



Portable Air Conditioner

PAG Series

Features

Air flow and performance

- Cools, dehumidifies and ventilates your room.
- Automatic de-icing.
- Automatic stop with visual indicator to show when the tank is full.

Voltage

- 120V, 60Hz.

Control

- 24H timer: Programmable start and stop.
- Includes wireless remote.

Installation

- Designed to be installed in a slide window.
- Fitted with wheels so you can easily move it from room to room.

Features


- Includes a removable and reusable filter.
- Automatic restart function.

Warranty


- 1-year warranty against all defects.

Application

- Designed to be installed inside a window, ideal for cooling rooms in the home.

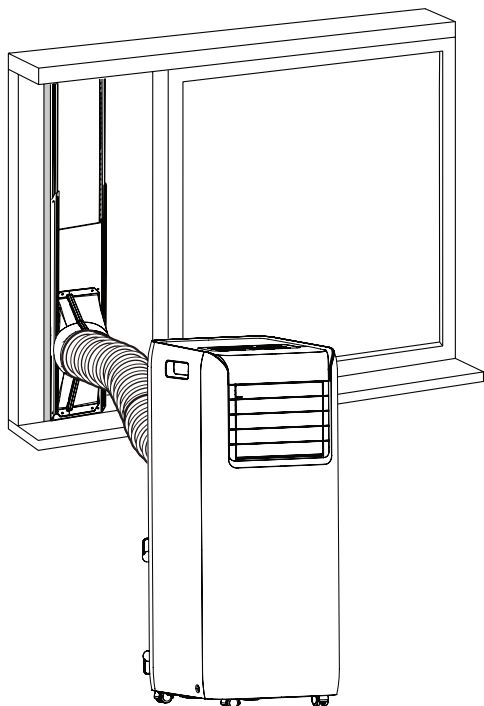

PAG-S

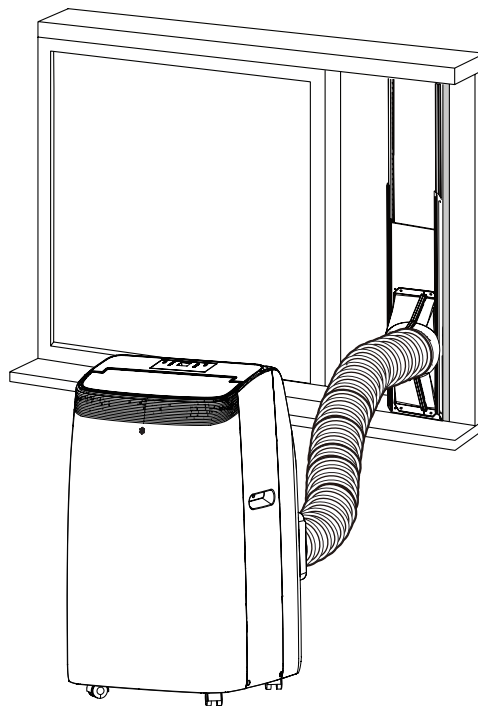

PAG-L & PAG-Y



Portable Air Conditioner

PAG Series

Models

Product #		PAG-S05KCO610C		PAG-S06KCO630C	
Series		PAG-S		PAG-S	
Technical Performance					
Voltage		Volts	115/60Hz	115/60Hz	
Cooling capacity (SACC)		BTU/hr	5100	6000	
Cooling capacity (Ashrae)		BTU/hr	8500	9500	
Used cooling power input		W	850	985	
Used power input		W	750	900	
Rated current		A	7.4	8.7	
UL Rated current		A	10.5	12	
Combined energy efficiency ratio		CEER	6.1	6.5	
Energy efficiency rating		EER	2.93	2.82	
Air flow volume		m³/hr	300/240	300/240	
		cfm	175/140	175/140	
Dehumidification		l/hr	0.95	1.2	
		pt/day	50.2	63.4	
Application area		pi² (m²)	150 (14)	250 (23)	
Sound level		dB	54/50	54/50	
Operating ambient temperature		Indoor °C (°F)	19-27 (66-79)	19-27 (66-79)	
		Outdoor °C (°F)	18-35 (64-95)	18-35 (64-95)	
Refrigerant			R32	R32	
Functions					
Electronic control			✓	✓	
Auto fan			✓	✓	
Timer			✓	✓	
Fan speeds mode with X speeds			2	2	
Dehumidifying mode			✓	✓	
Sleep mode			✓	✓	
Self-diagnosis			✓	✓	
Includes					
Washable filter			✓	✓	
Remote control			✓	✓	
Window filling panel			✓	✓	
Dimension					
Product dimension	W x H x D	in. (mm)	11.01 x 26.6 x 11.4 (280 x 675 x 290)	11.01 x 26.6 x 11.4 (280 x 675 x 290)	
Package dimension (ISTA 6A)	W x H x D	in. (mm)	13.3 x 34.5 x 12.9 (337 x 877 x 328)	13.3 x 34.5 x 12.9 (337 x 877 x 328)	
ISTA 6A	Qty/40HQ		735	735	

Standard color: White





Portable Air Conditioner

PAG Series

Models

Product #		PAG-L09KCO623C	PAG-L10KCO663C	PAG-L11KCO697C
Series		PAG-L	PAG-L	PAG-L
Technical Performance				
Voltage	Volts	115V/60Hz	115V/60Hz	115V/60Hz
Cooling capacity (SACC)	BTU/hr	5300	6300	7250
Cooling capacity (Ashrae)	BTU/hr	9000	10000	11000
Used cooling power input	W	1015	1075	1190
Used power input	W	770	925	1030
Rated current	A	8.9	9.6	10.6
UL Rated current	A	7.5	9.2	11
Combined energy efficiency ratio	CEER	6.23	6.63	6.97
Energy efficiency rating	EER	2.6	2.72	2.69
Air flow volume	m³/hr	400/300	400/300	400/300
	cfm	235/170	235/170	235/170
Dehumidification	l/hr	0.82	1.2	1.4
	pt/day	41.5	60.8	70.9
Application area	pi² (m²)	150 (14)	250 (23)	300 (28)
Sound level	dB	52/49	53/50	53/50
Operating ambient temperature	Indoor °C (°F)	19-27 (66-79)	19-27 (66-79)	19-27 (66-79)
	Outdoor °C (°F)	18-35 (64-95)	18-35 (64-95)	18-35 (64-95)
Refrigerant		R32	R32	R32
Functions				
Electronic control		✓	✓	✓
Auto fan		✓	✓	✓
Timer		✓	✓	✓
Fan speeds mode with X speeds		2	2	2
Dehumidifying mode		✓	✓	✓
Sleep mode		✓	✓	✓
Self-diagnosis		✓	✓	✓
Includes				
Washable filter		✓	✓	✓
Remote control		✓	✓	✓
Window filling panel		✓	✓	✓
Dimension				
Product dimension	W x H x D	in. (mm) 15.3 x 24.8 x 14.0 (388 x 630 x 356)	in. (mm) 15.3 x 24.8 x 14.0 (388 x 630 x 356)	in. (mm) 15.3 x 24.8 x 14.0 (388 x 630 x 356)
Package dimension (ISTA 6A)	W x H x D	in. (mm) 17.36 x 26.2 x 17.8 (440 x 665 x 453)	in. (mm) 17.36 x 26.2 x 17.8 (440 x 665 x 453)	in. (mm) 17.36 x 26.2 x 17.8 (440 x 665 x 453)
ISTA 6A	Qty/40HQ	535	535	535

Standard color: White et noir





Portable Air Conditioner

PAG Series

Models

Product #		PAG-Y11KCO730C		PAG-Y14KCO790C	
Series		PAG-Y		PAG-Y	
Technical Performance					
Voltage		Volts	115V/60Hz	115V/60Hz	
Cooling capacity (SACC)		BTU/hr	8150	10200	
Cooling capacity (Ashrae)		BTU/hr	12000	14000	
Used cooling power input		W	1250	1440	
Used power input		W	1060	1230	
Rated current		A	11.2	12.8	
UL Rated current		A	12	11	
Combined energy efficiency ratio		CEER	7.3	7.9	
Energy efficiency rating		EER	3.04	2.84	
Air flow volume		m³/hr	370/200	420	
		cfm	218/118	247	
Dehumidification		l/hr	1.5	1.9	
		pt/day	79.2	100.32	
Application area		pi² (m²)	350 (32)	450 (41)	
Sound level		dB	52/49	54	
Operating ambient temperature		Indoor °C (°F)	19-27 (66-79)	19-27 (66-79)	
		Outdoor °C (°F)	18-35 (64-95)	18-35 (64-95)	
Refrigerant			R32	R32	
Functions					
Electronic control			✓	✓	
Auto fan			✓	✓	
Timer			✓	✓	
Fan speeds mode with X speeds			2	2	
Dehumidifying mode			✓	✓	
Sleep mode			✓	✓	
Self-diagnosis			-	-	
Includes					
Washable filter			✓	✓	
Remote control			✓	✓	
Window filling panel			✓	✓	
Dimension					
Product dimension		W x H x D	in. (mm)	14.06 x 27.09 x 16.5 (419 x 688 x 358)	14.06 x 27.09 x 16.5 (419 x 688 x 358)
Package dimension (ISTA 6A)		W x H x D	in. (mm)	18.19 x 34.65 x 15.43 (460 x 865 x 396)	18.19 x 34.65 x 15.43 (460 x 865 x 396)
ISTA 6A		Qty/40HQ		444	444

Standard color: White

