



Window Air Conditioner

WAG Series

Features

Air flow and performance

- Cools, dehumidifies and ventilates your room.
- Automatic de-icing.

Voltage

- 120V, 60Hz.

Control

- 24H timer: Programmable start and stop.
- Includes wireless remote.

Installation

- Designed to be installed in standard double-hung windows.

Features


- 2-3-speed fan (high, medium and low).
- Energy-saving mode: Provides optimal comfort while saving energy.
- Includes a removable and reusable filter, with filter check indicator.
- Automatic restart function.

Warranty

- 1-year warranty against all defects.

Application

- Designed to be installed inside a window, ideal for cooling rooms in the home.

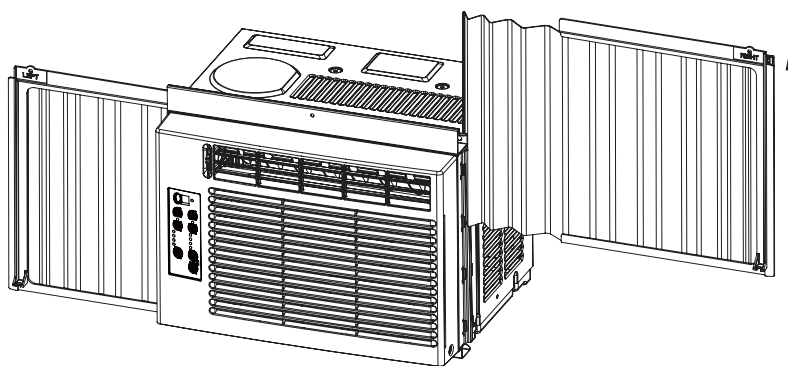



Window Air Conditioner

WAG Series

Models

Product #			WAG-C05KMCO110E	WAG-C06KECO110E
Series			WAG-C	WAG-C
ENERGY STAR			-	-
Technical Performance				
Voltage		Volts	115V/60Hz	115V/60Hz
Cooling capacity		BTU/hr	5000	6000
Used power input		W	450	550
Rated current		A	4.5	6
Energy efficiency rating		EER	11	11
Air flow volume		m³/hr	240/170	260/210/180
		cfm	141/100	153/129/112
Dehumidification		l/hr	0.6	0.8
		pt/day	30	40
Application area		sq. ft. (sq.m)	150 (14)	250 (23)
Sound level		dB	55/51	55/53/51
Operating ambient temperature	Indoor	°C (°F)	16-31 (61-88)	16-31 (61-88)
	Outdoor	°C (°F)	18-43 (64-109)	18-43 (64-109)
Refrigerant			R32	R32
Functions				
Control			Mecanic	Electronic
Auto fan			✓	✓
Timer			✓	✓
Energy saving mode			✓	✓
Fan speeds mode with X speeds			2	3
Dehumidifying mode			✓	✓
Sleep mode			-	✓
Memory			✓	✓
Self-diagnosis			-	-
Includes				
Washable filter			✓	✓
Remote control with battery			-	✓
Window filling panel			✓	✓
Mounting hardware			-	-
Dimension				
Indoor window opening	Width between	in. (mm)	23 and 34 (584 and 863)	23 and 34 (584 and 863)
	Hight of	in. (mm)	14.5 (368)	14.5 (368)
Product dimension	W x H x D	in. (mm)	15.98 x 12.0 x 13.07 (406 x 305 x 332)	15.98 x 12.52 x 15.2 (406 x 318 x 386)
Package dimension (ISTA 1A)	W x H x D	in. (mm)	17.91 x 14.76 x 14.57 (455 x 375 x 370)	18.0 x 14.57 x 16.93 (461 x 370 x 430)
ISTA 1A	Qty/40HQ		1105	940


Standard color: White



Mecanic Control



Electronic Control

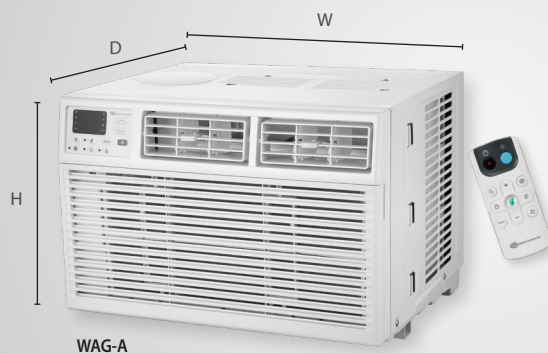

Window Air Conditioner


WAG Series

Models

Product #			WAG-A08KECO109E	WAG-A10KECO109E	WAG-A12KECO109E
Series			WAG-A	WAG-A	WAG-A
ENERGY STAR			-	-	-
Technical Performance					
Voltage		Volts	115V/60Hz	115V/60Hz	115V/60Hz
Cooling capacity		BTU/hr	8000	10000	12000
Used power input		W	730	910	1090
Rated current		A	8	9.5	11
Energy efficiency rating		EER	10.9	10.9	10.9
Air flow volume		m³/hr	320/290/260	360/322/290	450/388/355
		cfm	188/170/152	212/189/170	265/228/209
Dehumidification		l/hr	1.1	1.4	1.7
		pt/day	55	70	80
Application area		sq. ft. (sq.m)	350 (32)	450 (41)	550 (51)
Sound level (Hi/Med/Lo)		dB	58/56/54	59/56/54	60/58/56
Operating ambient temperature	Indoor	°C (°F)	16-31 (61-88)	16-31 (61-88)	16-31 (61-88)
	Outdoor	°C (°F)	18-43 (64-109)	18-43 (64-109)	18-43 (64-109)
Refrigerant			R32	R32	R32
Functions					
Electronic control			✓	✓	✓
Auto fan			✓	✓	✓
Timer			✓	✓	✓
Energy saving mode			✓	✓	✓
Fan speeds mode with X speeds			3	3	3
Dehumidifying mode			✓	✓	✓
Sleep mode			✓	✓	✓
Memory			✓	✓	✓
Self-diagnosis			-	-	-
Includes					
Washable filter			✓	✓	✓
Remote control with battery			✓	✓	✓
Window filling panel			✓	✓	✓
Mounting hardware			-	-	-
Dimension					
Indoor window opening	Width between	in. (mm)	23 and 34 (584 and 863)	23 and 34 (584 and 863)	26 and 36 (660 and 914)
	Hight of	in. (mm)	14.5 (368)	14.5 (368)	TBD (TBD)
Product dimension	W x H x D	in. (mm)	18.58 x 13.31 x 15.59 (472 x 338 x 396)	18.58 x 13.31 x 17.32 (472 x 338 x 440)	19.76 x 15.16 x 21.5 (502 x 385 x 546)
Package dimension (ISTA 1A)	W x H x D	in. (mm)	21.37 x 14.76 x 17.48 (540 x 375 x 450)	21.42 x 14.76 x 19.13 (544 x 375 x 486)	21.69 x 17.13 x 23.66 (551 x 435 x 601)
ISTA 1A	Otv/40HO		755	672	468



Standard color: White

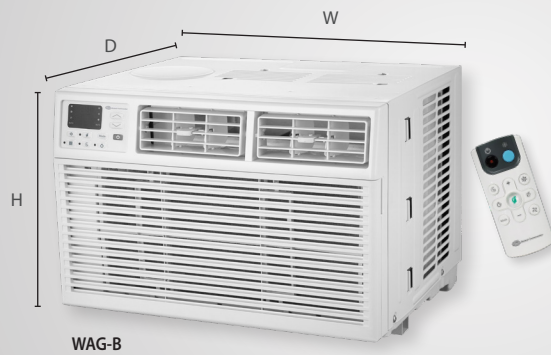

Window Air Conditioner

WAG Series

Models

Product #			WAG-B06KECO137E	WAG-B08KECO147E	WAG-B10KECO147E
Series			WAG-B	WAG-B	WAG-B
ENERGY STAR 5.0			✓	✓	✓
Technical Performance					
Voltage	Volts		115V/60Hz	115V/60Hz	115V/60Hz
Cooling capacity	BTU/hr		6000	8000	10000
Used power input	W		TBD	TBD	TBD
Rated current	A		TBD	TBD	TBD
Energy efficiency rating	EER		13.7	14.7	14.7
Air flow volume	m³/hr		TBD	TBD	TBD
	cfm		TBD	TBD	TBD
Dehumidification	l/hr		TBD	TBD	TBD
	pt/day		TBD	TBD	TBD
Application area	sq. ft. (sq.m)		250 (23)	350 (32)	450 (41)
Sound level	dB		TBD	TBD	TBD
Operating ambient temperature	Indoor °C (°F)		TBD	TBD	TBD
	Outdoor °C (°F)		TBD	TBD	TBD
Refrigerant			R32	R32	R32
Functions					
Electronic control			✓	✓	✓
Auto fan			✓	✓	✓
Timer			✓	✓	✓
Energy saving mode			✓	✓	✓
Fan speeds mode with X speeds			TBD	TBD	TBD
Dehumidifying mode			✓	✓	✓
Sleep mode			✓	✓	✓
Memory			✓	✓	✓
Self-diagnosis			✓	✓	✓
Includes					
Washable filter			✓	✓	✓
Remote control with battery			✓	✓	✓
Window filling panel			✓	✓	✓
Mounting hardware			✓	✓	✓

Standard color: White

